


3500/15 AC and DC Power Supplies

Product Datasheet

Bently Nevada* Asset Condition Monitoring

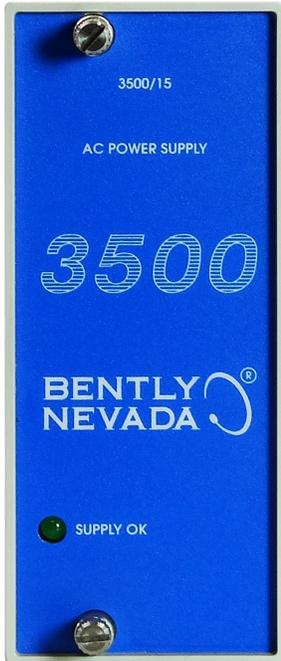

Description

The 3500/15 AC and DC Power Supplies are half-height modules and must be installed in designated slots on the left side of the rack. The 3500 rack can contain one or two power supplies with any combinations of AC and DC. Either supply can power a full rack.

When two power supplies are installed in a rack, the one in the lower slot acts as the primary supply, and the other in the upper slot acts as the backup supply. If installed, the second supply is the backup for the primary one.

Removing or inserting either power supply module does not disrupt operation of the rack as long as a second power supply is installed.

The 3500/15 AC and DC Power Supplies accepts a wide range of input voltages and converts them to voltages acceptable for use by other 3500 modules. The following power supplies are available with the 3500 Series Machinery Protection System:

- Universal AC Power
- High Voltage DC Power Supply
- Low Voltage DC Power Supply

| Note | |
|---|--|
|  | The Universal AC Power Supply and PIM are not compatible with the Legacy 3500 AC Power Supply, High Voltage AC PIM, and Low Voltage AC PIM. |



Specifications

Inputs

Voltage Options

| Universal Voltage AC | |
|----------------------|--|
| Description | This option uses the universal AC Power Supply and universal AC Power Input Module (PIM). |
| Input Voltage | 110 to 220 Vac nominal 85 to 264 Vac rms 120 to 373 Vac pk The universal AC Power Supply and Power Input Module are not compatible with the legacy High Voltage AC or Low Voltage AC units. |
| Input Frequency | 47 to 63 Hz |

| High Voltage DC | |
|-----------------|---|
| Description | This option uses the High Voltage DC Power Supply and the High Voltage DC Power Input Module (PIM). |
| Input voltage | 88 to 140 Vdc |

| Low Voltage DC | |
|----------------|--|
| Description | This option uses the Low Voltage DC Power Supply and the Low Voltage DC Power Supply Input Module (PIM). |
| Input voltage | 20 to 30 Vdc |

Current Information

| | |
|-------------------------|--|
| Out of Range Protection | For all power supply options, an under-voltage does not harm the supply or the PIM. An over-voltage causes the fuse to open on the PIM. |
|-------------------------|--|

| Full Rack Current Draw | |
|------------------------|---------------------|
| Universal voltage AC | 2.8 A rms (maximum) |
| High voltage DC | 2.5 A (maximum) |
| Low voltage DC | 10.0 A (maximum) |

Outputs

| Front Panel LEDs | |
|------------------|---|
| Supply OK LED | Indicates when the power supply is operating properly |

Physical

| Power Supply Module | |
|-------------------------------------|--|
| Dimensions (Height x width x depth) | 120.7 mm x 50.8 mm x 251.5 mm 4.75 in x 2.0 in x 9.9 in |
| Weight | 1.39 kg 3.06 lb |

| Power Input Modules | |
|-------------------------------------|--|
| Dimensions (Height x width x depth) | 120.7 mm x 25.4 mm x 114.3 mm 4.75 in x 1.0 in x 4.5 in |
| Weight | 0.34 kg 0.75 lb |

Rack Space Requirements

| | |
|---------------------|--|
| Power supply module | Two half-height slots are located on the left side of the rack. Each slot accommodates one power supply. Both slots can hold a power supply at the same time, allowing for redundant power supplies. |
| Power input module | Special half-height module located directly behind the associated power supply |

Miscellaneous

| | |
|-----------------|-----------------------------------|
| Minimum loading | No minimum rack load is required. |
|-----------------|-----------------------------------|

Environmental Limits

| | |
|-----------------------|---------------------------------------|
| Operating temperature | -30 °C to +65 °C -22 °F to +150 °F |
| Storage temperature | -40 °C to +85 °C -40 °F to +185 °F |
| Humidity | 95%, non-condensing |

Compliance and Certifications

| | |
|-------------------|--|
| EMC | <p>Standards: EN 61000-6-2 Immunity for Industrial Environments EN 61000-6-4 Emissions for Industrial Environments</p> <p>European Community Directive: EMC Directive 2014/30/EU</p> |
| Electrical Safety | <p>Standards: EN 61010-1</p> <p>European Community Directive: LV Directive 2014/35/EU</p> |

Hazardous Area Approvals



For the detailed listing of country and product specific approvals, refer to the **Approvals Quick Reference Guide**, document 108M1756, at www.GEmeasurement.com.

| | |
|--|---|
| CSA / NRTL/C (Approval Option 01) | <p>Ex nC [L] IIC T4 Gc Class I, Division 2, Groups A, B, C, D</p> <p>Class I, Zone 2 AEx nC IIC T4 Gc Class I, Division 2 Groups A, B, C, D</p> <p>T4 @ Ta = -20 °C to +65 °C (-4 °F to +150 °F) per drawing 149243 or 138547</p> |
| ATEX / IECEX (Approval Option 02) | <p> II 3 G Ex nA nC ic IIC T4 Gc</p> <p>T4 @ Ta = -20 °C to +65 °C (-4 °F to +150 °F)</p> |

Ordering Information



For the detailed listing of country and product specific approvals, refer to the **Approvals Quick Reference Guide**, document 108M1756, at www.GEmeasurement.com.

Product Description

3500/15 AXX - BXX - CXX


- A.** Power Supply Type (Top Slot)
 - 03** High Voltage DC (88 to 140 Vdc)
 - 04** Low Voltage DC (20 to 30 Vdc)
 - 05** Universal AC Voltage (85 to 264 Vac rms)
- B.** Power Supply Type (Bottom Slot)
 - 00** No Supply (Used when no supply is required)
 - 03** High Voltage DC (88 to 140 Vdc)
 - 04** Low Voltage DC (20 to 30 Vdc)
 - 05** Universal AC Voltage (85 to 264 Vac rms)
- C.** Agency Approval
 - 00** None
 - 01** CSA / NRTL / C (Class 1, Division 2)
 - 02** ATEX / IECEx / CSA (Class 1, Zone 2)

Spares

| Part Number | Description |
|-------------|--|
| 106M1079-01 | Universal AC Power Supply Module |
| 106M1081-01 | Universal AC Power Input Module |
| 129486-01 | High Voltage DC Power Supply Module |
| 129478-01 | High Voltage DC Power Input Module |
| 133292-01 | Low Voltage DC Power Supply Module |
| 133300-01 | Low Voltage DC Power Input Module |
| 01720025 | Replacement Fuse (for both AC Power Input Module and High Voltage DC Power Input Modules) |
| 01720045 | Replacement Fuse (Low Voltage DC Power Input Module) |
| 120M3877 | Replacement Fuse Fast blow rated at 5A/500 Vac Size 6.3 x 32 mm (Universal AC Power Input Module) |
| 129767-01 | Power Supply Operations and Maintenance Manual |
| 118M0915-01 | Replacement connector for Universal AC Power Input Module |
| 118M0915-02 | Replacement connector for DC Power Input Module |

Graphs and Figures

The following picture depicts the front and rear view of 3500/15 AC and DC Power Supplies and Input Modules:

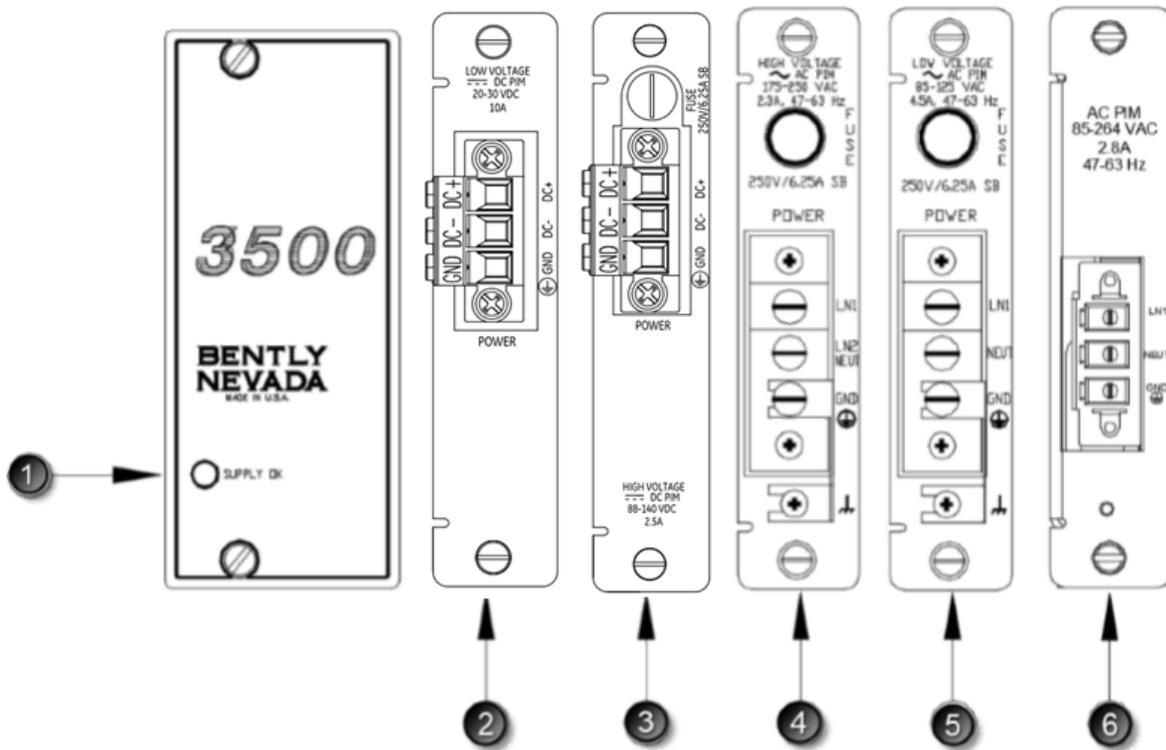

- 1: 3500/15 AC and DC Power Supplies OK LED
- 2: Low Voltage DC Power Input Module
- 3: High Voltage DC Power Input Module
- 4: Legacy High Voltage AC Power Input Module
- 5: Legacy Low Voltage AC Power Input Module
- 6: Universal AC Voltage Power Input Module

Figure 1: 3500/15 Power Supply and PIMS

Copyright 1999 - 2017 Baker Hughes, a GE company, LLC ("BHGE") All rights reserved.

* Denotes a trademark of Bently Nevada, LLC, a wholly owned subsidiary of Baker Hughes, a GE company.

All product and company names are trademarks of their respective holders.

Use of the trademarks does not imply any affiliation with or endorsement by the respective holders.

The information contained in this document is subject to change without prior notice.

1631 Bently Parkway South, Minden, Nevada USA 89423

Phone: 1-775.782.3611 www.GEmeasurement.com